

^  
STF815 12.8"DS +8.4/9.8mag

STF797 7.4"DS +7.4/9.8mag

^  
STF818 5.9"DS  
+9.8/10.1mag

• <= STF789 14.4"DS  
+6.1/10.2mag

• <= J36 1.5"DS  
+7.8/9.6mag

^  
STF788 7.5/35.6"TS  
+7.6/10.1/10.4mag

^  
STF815 12.8"DS  
+8.4/9.8mag

^  
STF818 5.9"DS  
+9.8/10.1mag


^  
STF837 19.7"DS  
+8.1/9.8mag

^  
STF837 19.7"DS  
+8.1/9.8mag

STF851 2.9"DS +8.9/9.5mag =>

^  
STF855 29.1"DS  
+5.7/6.7mag

J52 2.2"DS  
+8.2/9.6mag  
v

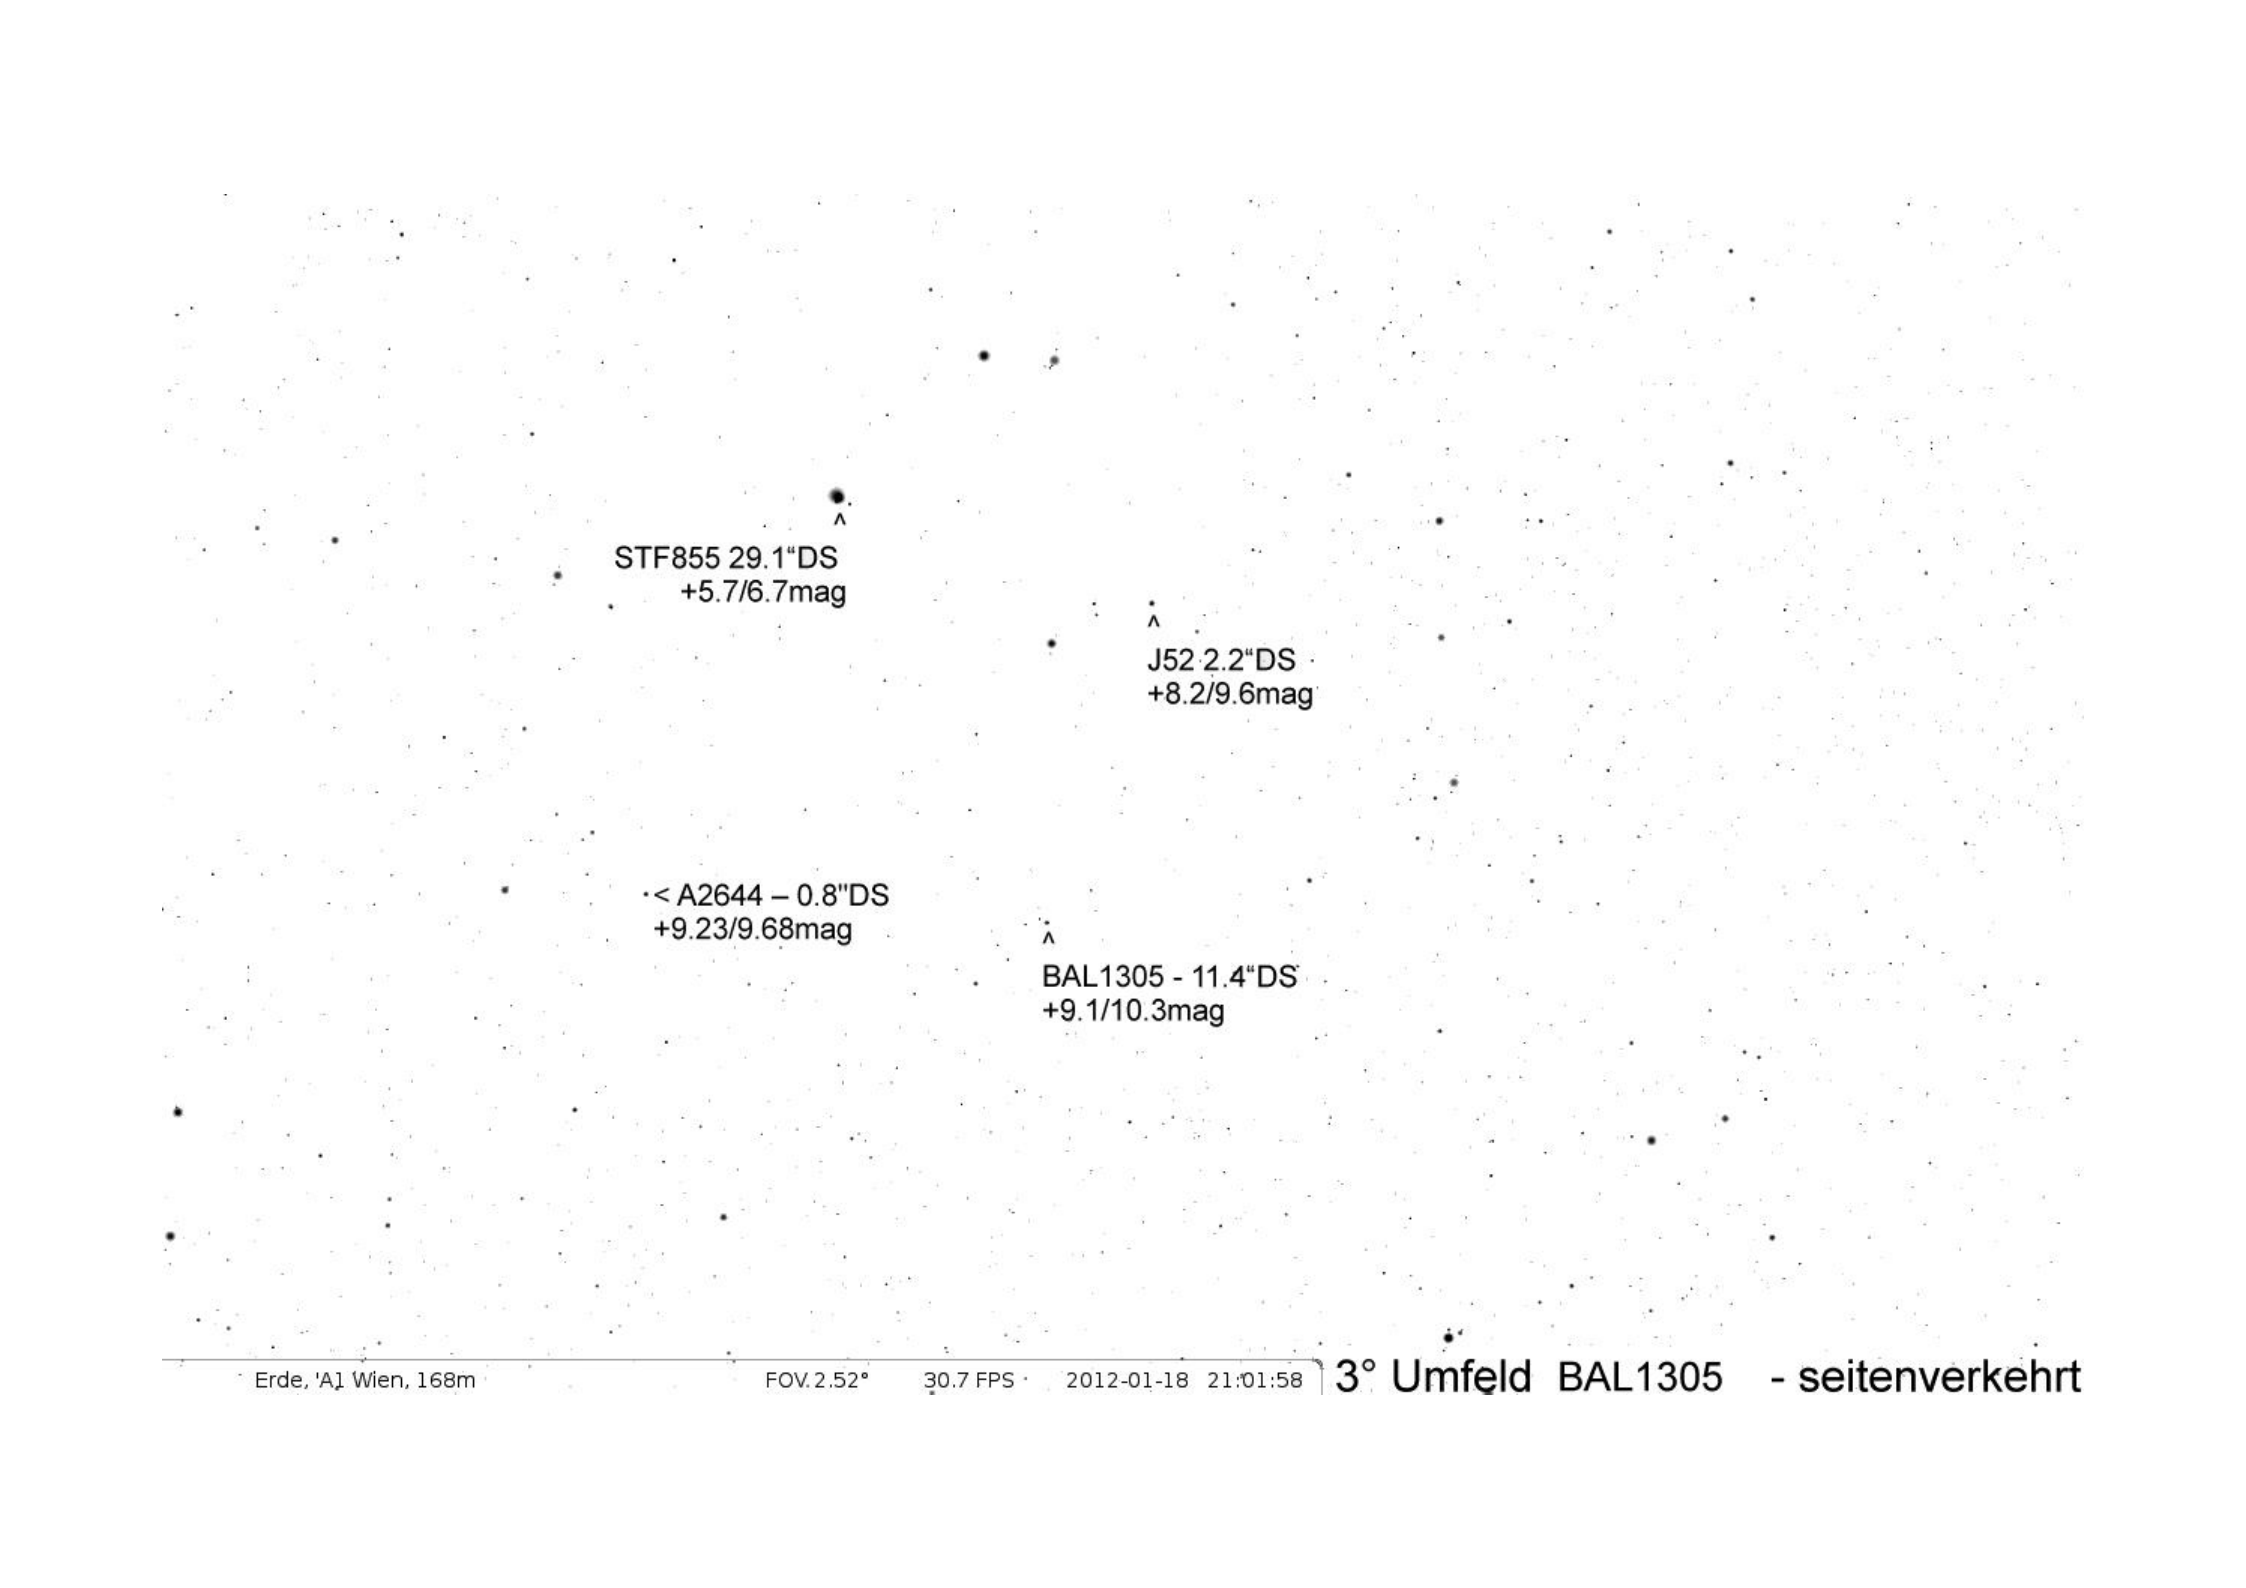

STF855 29.1"DS  
+5.7/6.7mag

J52 2.2"DS  
+8.2/9.6mag

< A2644 - 0.8"DS  
+9.23/9.68mag

BAL1305 - 11.4"DS  
+9.1/10.3mag